

Product features

Digitally Controlled Phase Shifter

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	5.65	~	5.95	GHz
IL			3	dB
VSWR			1.2	
Phase shift accuracy		±10		°


Other parameters

Phase shift bits	1位
Connector	SMA-K
Surface	Conductive oxidation
Power	30dBm Design assurance
Work Temp.	-30~+60°C Design assurance

Truth table

C	0	1
Phase	benchmarks	90°

Configuration(mm)

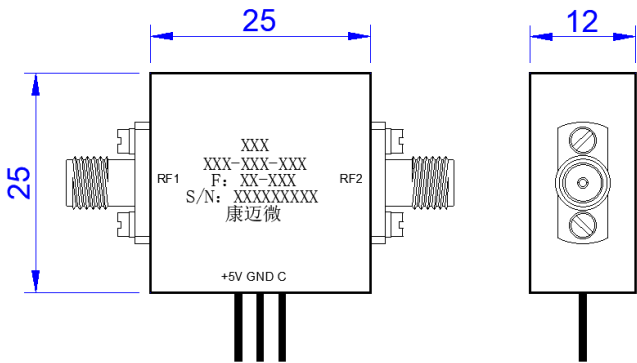

Note

1	Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.
---	---

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.