


### Main specifications

| Parameters        | Min | Typical | Max  | Units |
|-------------------|-----|---------|------|-------|
| Frequency         | 950 | ~       | 2150 | MHz   |
| Gain              | 0   |         |      | dB    |
| Isolation         | 10  | 15      |      | dB    |
| VSWR              |     |         | 2    |       |
| Amplitude balance |     | ±1      |      | dB    |
| Phase balance     |     | ±5      |      | °     |
| P-1dB             | 5   |         |      | dBm   |

### Other parameters

|            |                                               |
|------------|-----------------------------------------------|
| way        | 4-way                                         |
| Impedance  | 50Ω                                           |
| Connector  | SMA-K                                         |
| Work Temp. | -40~+70°C Design assurance                    |
| Other      | Working voltage: 12V; Working current: 150mA. |

### Configuration(mm)

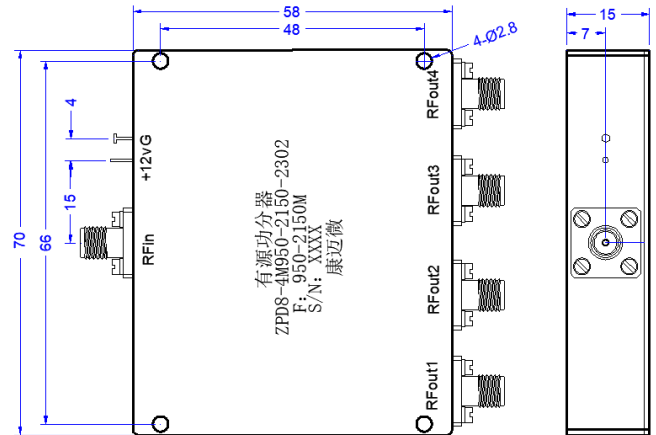

### Note

|   |                                                                                                                   |
|---|-------------------------------------------------------------------------------------------------------------------|
| 1 | Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution. |
|---|-------------------------------------------------------------------------------------------------------------------|