

Tech specifications

Parameters	Min	Typical	Max	Units
Frequency	1	~	30	MHz
IL			1	dB
Isolation	75			dB
VSWR			1.5	

Other parameters

Switch way	DPDT
Control	TTL Control
Switching characteristic	Reflective switch
Switch time	150ns
Connector	SMA-K
Connector material	Stainless steel
Power	1W Design assurance
Product shell material	Aluminium
Working voltage	+5V
Working current	100mA
Work Temp.	-40~+85°C Design assurance
Quality Grade	Industrial grade


表格标题

TTL	1	0
passband	RFC-RF1	RFC-RF2

Port Definition

Common port	RFC
Branching port	RF1,RF2

Configuration(mm)

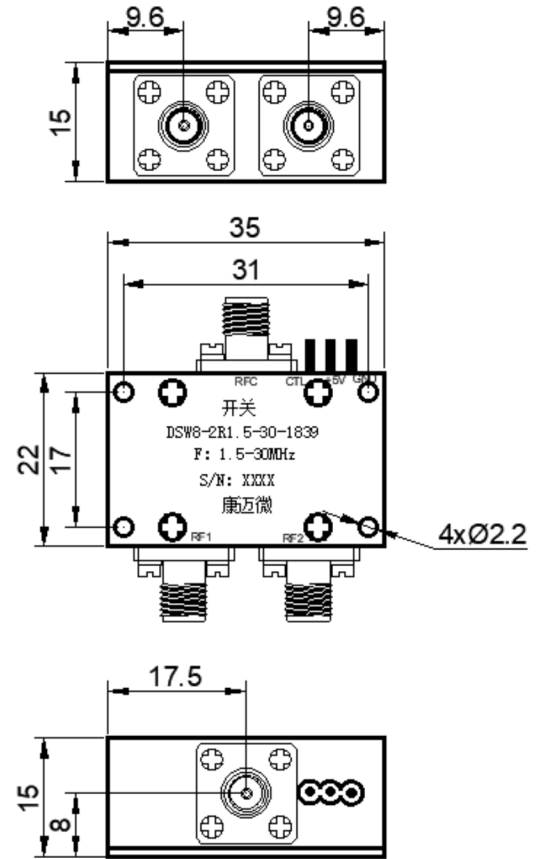

Note

1	Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.
2	If the temperature is higher than 125°C, consult with us before ordering.