

Product features

Broadband, high-power.

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	8000	~	21000	MHz
IL			1.5	dB
Bidirectional coupling	29	30	31	dB
Directivity	10			dB
Main line VSWR			1.5	
Coupled line VS WR			1.5	


Other parameters

Connector	SMA-K
Connector material	Stainless steel
Impedance	50Ω
Power	20W Design assurance
Shell Material	Aluminium
Work Temp.	-45~+85°C Design assurance

Reference picture



Configuration(mm)

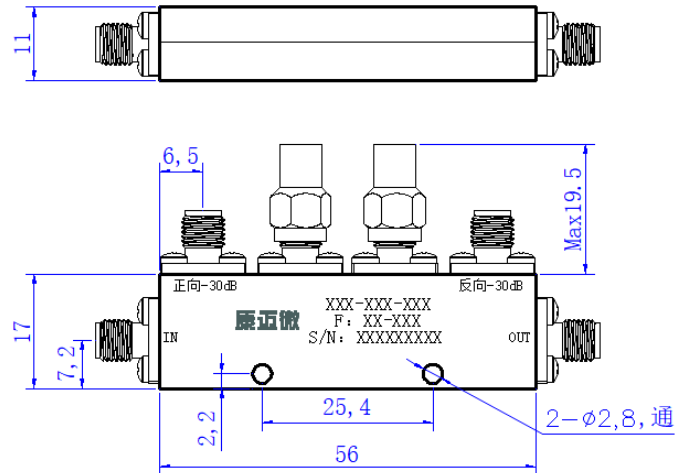

Note

1	Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.
2	If the temperature is higher than 125°C, consult with us before ordering.