

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	0	~	12.4	GHz
VSWR			1.35	


Other parameters

Power Capacity	20W Design assurance
Impedance	50Ω
Connector	SMA-F
Connector material	Stainless steel
Surface	Black
Product shell material	Aluminum
Operation Temp	-40~+85°C Design assurance

Note

When installing the load, it is necessary to consider sufficient heat dissipation space and not install it next to equipment with high heat output.

Power Derating Curve

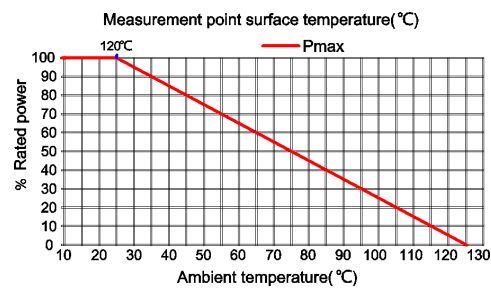

Configuration(mm)

