

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	830	~	930	MHz
IL			1	dB
Isolation	20			dB
Input VSWR			1.4	
Output VSWR			1.4	
Amplitude balance			±0.4	dB
Phase balance			±4	°


Other parameters

Power	150W Design assurance
way	4-way
Phase	0°
Impedance	50Ω
Connector	SMA-K
Surface	Conductive oxidation
Product shell material	Aluminium
Work Temp.	-40~+70°C Design assurance
Quality Grade	Industrial grade

Port Definition

Common port	0
Dispatch Port	1, 2, 3, 4

Configuration(mm)

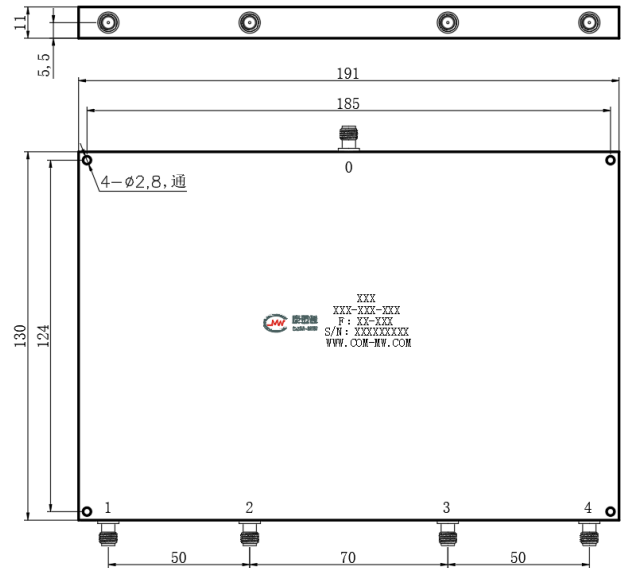

Note

1	Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.
2	If the temperature is higher than 125°C, consult with us before ordering.