


Tech specifications

Parameters	Min	Typical	Max	Units
Frequency	20	~	22	GHz
IL			4	dB
Isolation	60			dB
VSWR			2	


Other parameters

Switch way	SP3T
Control	TTL Control
Switching characteristic	Electronic reflective switch
Switch time	50ns
Connector	2.92-K
Connector material	Stainless steel
Impedance	50Ω
Power Capacity	0.2W Design assurance
Working voltage	+5V
Working current	40mA
Operation Temp	-40~+70°C Design assurance

Reference picture



Configuration(mm)

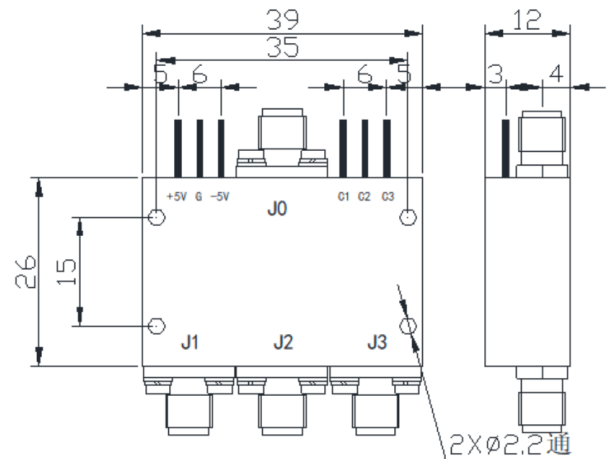

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
2	If the temperature is higher than 125°C, consult with us before ordering.