

## Product features

Low VSWR.

## Main specifications

Parameters	Min	Typical	Max	Units
Frequency	17.6	~	26.7	GHz
VSWR			1.2	


## Other parameters

Power	300W
Connector	Waveguide
Waveguide port	BJ220
Waveguide flange	FBP220
Product shell material	Aluminium
Work Temp.	-40~+85°C Design assurance

## Reference picture



## Configuration(mm)

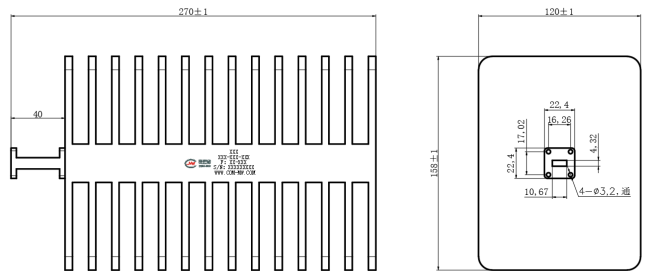

## Note

Heat dissipation space is needed for installing the load, far away from the equipment with large heat output