

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	0.95	~	2.3	GHz
IL		1.5	2	dB
Isolation	20			dB
Input VSWR		1.3	1.4	
Output VSWR		1.3	1.4	
Amplitude balance			0.6	dB
Phase balance			6	°

Other parameters

Power	15W
way	16-way
Phase	0°
Impedance	50Ω
Connector	SMA-K
Connector material	Stainless steel
Surface	White
Product shell material	Aluminium
Work Temp.	-30~+70°C Design assurance
Quality Grade	Industrial grade


Port Definition

Common port	0
Dispatch Port	1~16

Reference picture



Configuration(mm)

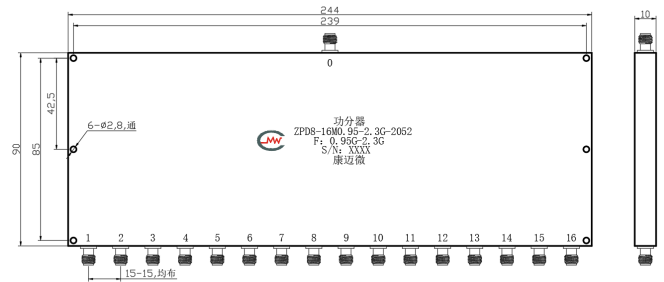

Note

1	Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.
2	If the temperature is higher than 125°C, consult with us before ordering.