


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	8965	~	8975	MHz
Center loss	/	/			3	dB
Rejection	DC-8945	MHz≥	20			dB
Rejection	8995-14000	MHz≥	20			dB
Passband VSWR	/	/			1.4	

Other parameters

Connector	SMA-K
Impedance	50Ω
Surface	silver-plate
Power Capacity	10W Design assurance
Product shell material	Aluminium
Quality Grade	Industrial grade
Other	Normal temperature use

Configuration(mm)

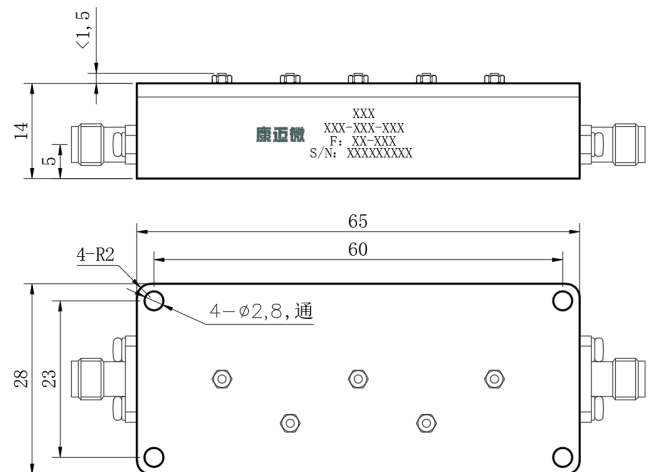

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
---	--