

Product features

Low loss, high power.


Main specifications

Parameters	Min	Typical	Max	Units
Frequency	17.6	~	26.7	GHz
IL			0.5	dB
VSWR			1.25	dB

Other parameters

Power	200W
Waveguide model	Rect waveguider
Connector 1	BJ220
Connector 2	BJ220
Flange model	FBP
Surface	Grey
Work Temp.	-40~+70℃ Design assurance

Configuration(mm)

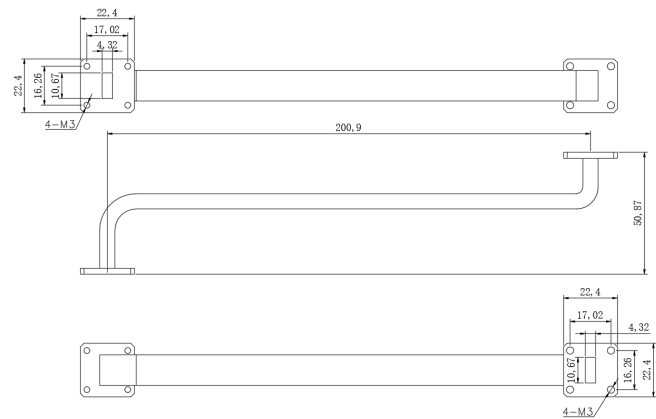

Note

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.